

B3020S	Outer Rotor	Output Power 输出功率: 0.1W~1.2W	Weight 重量: 75g (Approx.)
	外转子		

Single-Phase Brushless DC Motor-Typical Application 单相无刷直流电机-典型应用

Automotive Parts: Micro Fan 汽车部件: 小型风扇

Home Application: USB Fan, Small Air Freshener, Mini Fan, Mosquito Killer


家用电器: USB 电风扇, 小功率空气清新机, 微型风扇, 灭蚊器

Medical Apparatus: Medical Pump, Medical Blower, Super-Silence Fan

医疗器械: 医疗泵, 鼓风机, 医用鼓风机, 超静音风扇

Industry Equipment: Electric Valve, Actuator 工业设备: 电动阀门, 致动器

Business Equipment: Printer, Copier, Projector 商业设备: 打印机, 复印机, 投影机




Model 型号	Voltage(V) 电压		No Load 空载		Rated Load 额定负载			Stall 堵转		
	Operating Range	Rated	Speed (rpm)	Current (A)	Torque (mNm)	Speed (rpm)	Current (A)	Output P. (W)	Torque (mNm)	Current (A)
B3020S-S01	5-14	12	6454	0.127	3.53	3024	0.389	1.12	6.65	0.62
B3020S-S02	5-14	12	2759	0.064	1.20	1849	0.108	0.23	3.64	0.19
B3020S-S03	5-14	12	2900	0.065	1.02	2350	0.095	0.25	4.90	0.20

Characteristic: CW, Signal function available, Locked rotor protection, Stepless speed regulation, Low noise, Low EMI, Long life 10000-30000hrs
特征: 单转向, 信号功能, 锁定保护, 无级调速, 低噪音, 低电磁干扰, 超长寿命 10000-30000 小时



Notice: Data in this typical specification sheet are for other certain customer. Voltage, rated torque, speed, current, power and shaft extension feature & dimension can be changed to meet customer specific requirement.

注意: 上述规格仅针对特定客户, 电压、扭矩、转速、电流、功率、输出轴的特征和尺寸等都可以按照客户的特殊要求进行调整。

Outline Drawing 外形图: Unit: Millimeter

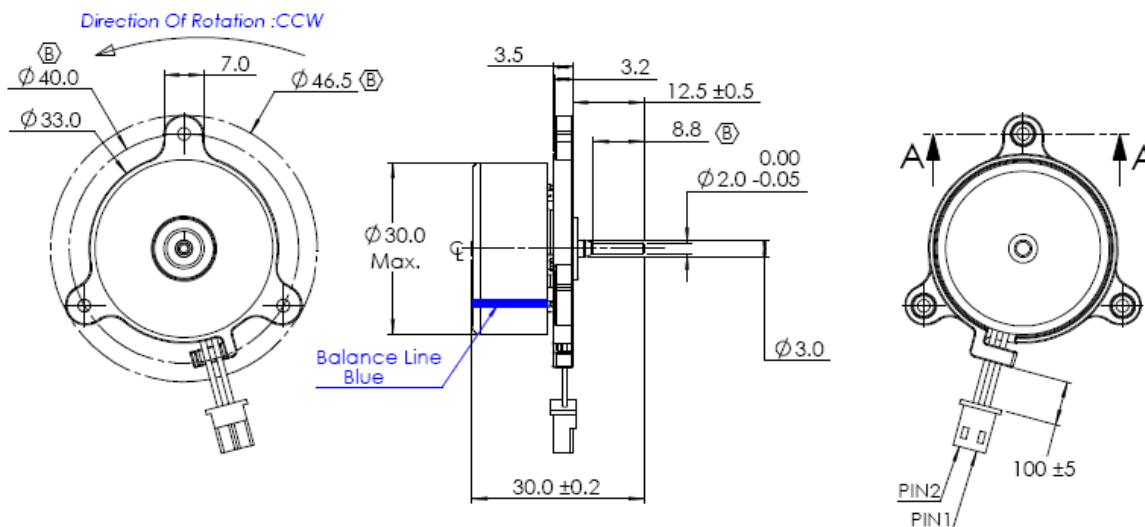

Performance Curve 性能曲线:

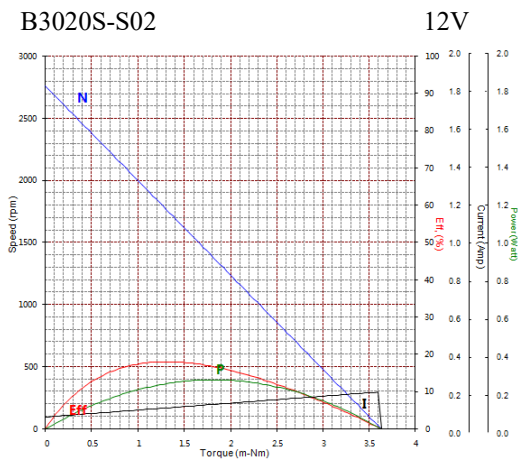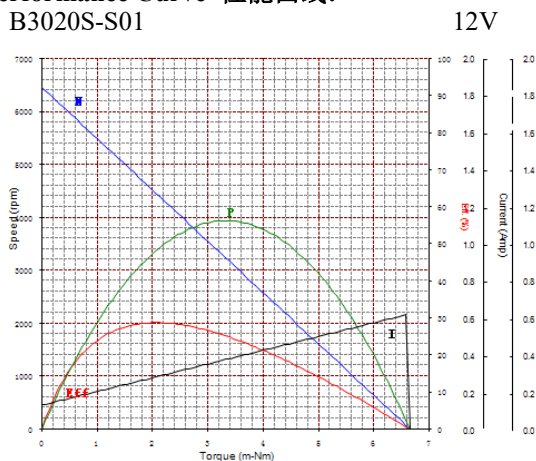

地址: 广东省深圳市宝安区福海新田大道福宁高新产业园 A 栋、F 栋

Address: Building A & F, Funing Hi-Tech Park, Xintian Road, Fuhai, BaoAn District, Shenzhen, Guangdong Province, China

电话 Tel: 86-755-29169191,29169292 传真 Fax: 86-755-29169007 邮箱 Email:sales@hengdrive.com 网址 Http://www.hengdrive.com