


B7018S	Outer Rotor	Output Power 输出功率: 20W~50W	Weight 重量: 200g (Approx.)
	外转子		

Directly Drive Brushless DC Motor (DD BLDC)-Typical Application (In Development)

直驱无刷直流电机-典型应用 (研发中)

Specialized for Medical Joint Drive, Robot Joint Drive, Electrical Actuator, Automobile Pump

用于医用关节驱动, 机器人关节驱动, 电动致动器, 汽车泵




Model 型号	Voltage(V) 电压		No Load 空载		Rated Load 额定负载				Stall 堵转	
	Operating Range	Rated	Speed (rpm)	Current (A)	Torque (Nm)	Speed (rpm)	Current (A)	Output P. (W)	Torque (Nm)	Current (A)
B7018S-S01	8-26	14.8	923	0.09	0.35	507	2.39	18.60	0.77	6.6
B7018S-S02	8-26	24	3627	0.27	0.3	3082	5.06	96.8	1.99	32.2

Characteristic: CW & CCW, Signal function available, Locked rotor protection, Stepless speed regulation, Low noise, Low EMI, Long life 10000-50000hrs
特征: 双转向, 信号功能, 无级调速, 低噪音, 低电磁干扰, 超长寿命 10000-30000 小时

Notice: Data in this typical specification sheet are for other certain customer. Voltage, rated torque, speed, current, power and shaft extension feature & dimension can be changed to meet customer specific requirement.

注意: 上述规格仅针对特定客户, 电压、扭矩、转速、电流、功率、输出轴的特征和尺寸等都可以按照客户的特殊要求进行调整。

Outline Drawing 外形图: Unit: Millimeter

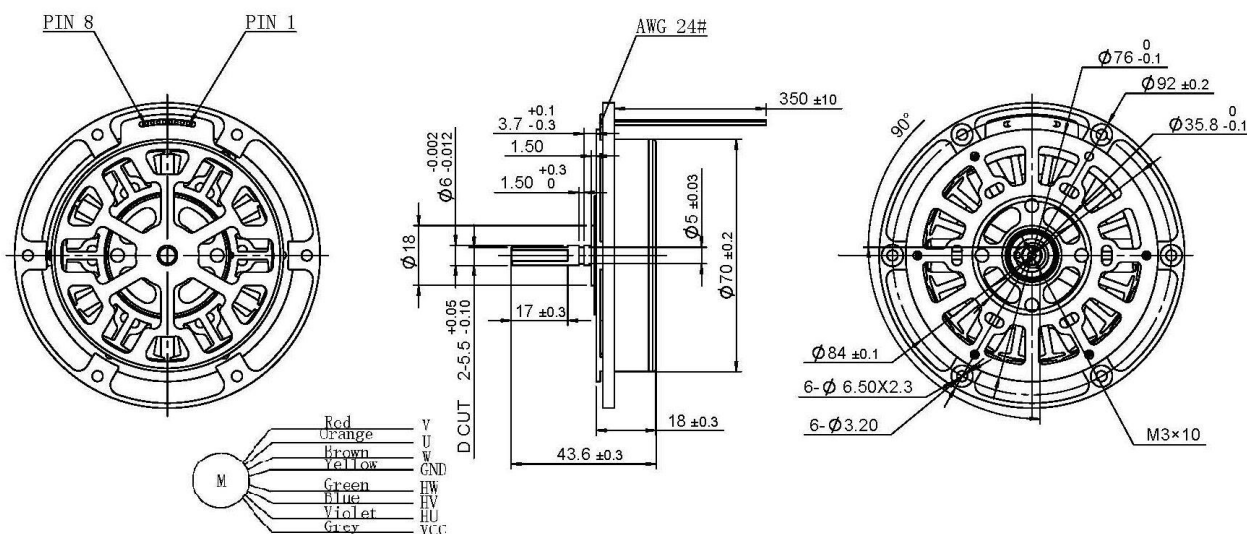


Usable machine screw length 4.0mm max. from motor mounting surface

Unit: Millimeter

Performance Curve 性能曲线:


B7018S-S01

14.8V

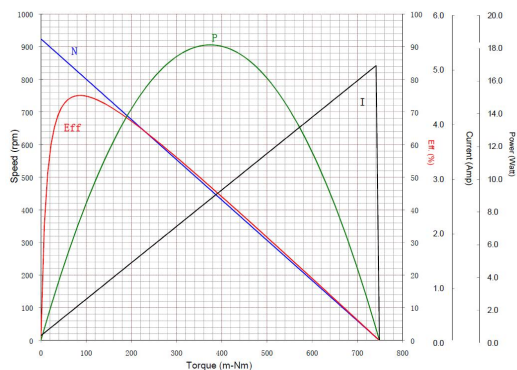

B7018S-S02

24V

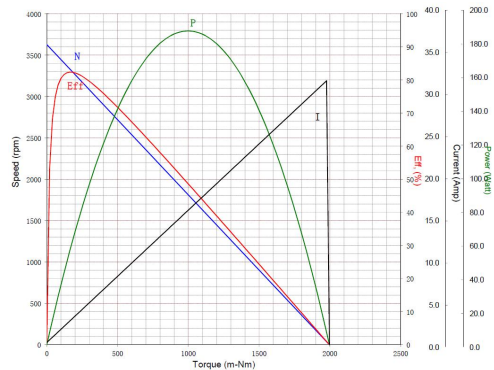

地址: 广东省深圳市宝安区福海新田大道福宁高新产业园 A 栋、F 栋

Address: Building A & F, Funing Hi-Tech Park, Xintian Road, Fuhai, BaoAn District, Shenzhen, Guangdong Province, China

电话 Tel: 86-755-29169191, 29169292 传真 Fax: 86-755-29169007 邮箱 Email: sales@hengdrive.com 网址 Http://www.hengdrive.com