

B7083P

Output Power 输出功率: 20W~150W

Weight 重量: 1.3kg (Approx.)

Brushless DC Motor Pump-Typical Application

无刷直流电机泵-典型应用

Automotive Parts: Electronic Water Pump

汽车部件: 电子水泵




Model 型号	Voltage(V) 电压		No Load 空载		Rated Load 额定负载				Stall 堵转	
	Operating Range	Rated	Speed (rpm)	Current (A)	Torque (Nm)	Speed (rpm)	Current (A)	Output P. (W)	Torque (Nm)	Current (A)
B7083P-S01	8-26	12	7807	0.96	0.10	6776	8.37	70.96	0.76	20
B7083P-S02	8-26	24	7816	0.46	0.10	6768	4.17	70.88	0.75	28

Characteristic: High efficiency, Above IP67, Signal function available, Locked rotor protection, High current protection, Stepless speed regulation, Low noise, Low EMI, Long life 30000hrs
特征: 高效率, IP67, 信号功能, 锁定保护, 过流保护, 无级调速, 低噪音, 低电磁干扰, 超长寿命 30000 小时

Notice: Data in this typical specification sheet are for other certain customer. Voltage, rated torque, speed, current, power and shaft extension feature & dimension can be changed to meet customer specific requirement.

注意: 上述规格仅针对特定客户, 电压、扭矩、转速、电流、功率、输出轴的特征和尺寸等都可以按照客户的特殊要求进行调整。

Outline Drawing 外形图:

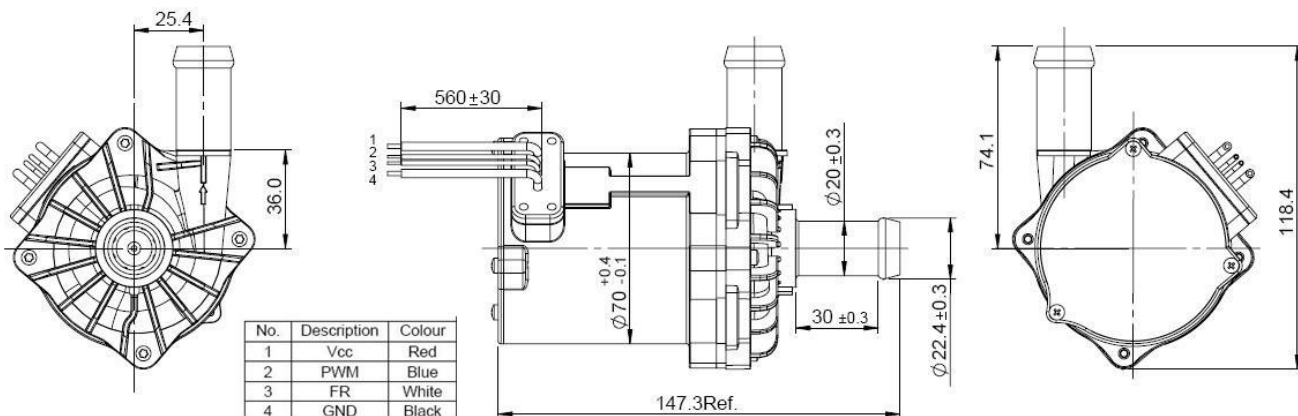


Unit: Millimeter

Performance Curve 性能曲线:

B7083P-S01

12V

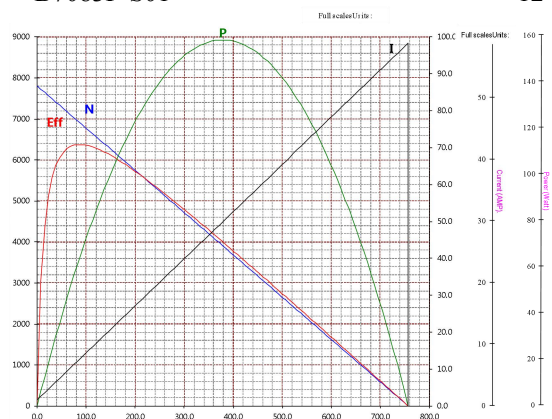


HQ Curve 扬尘-流量曲线:

B7083P-S01

12V

恒驱B7083P水泵电机性能曲线图 (扬尘-流量曲线)
Basic characteristic curve of Hengdrive B7083P pump

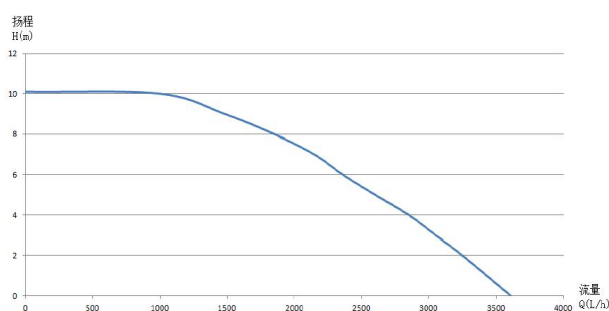

地址: 广东省深圳市宝安区福海新田大道福宁高新产业园 A 栋、F 栋

Address: Building A & F, Funing Hi-Tech Park, Xintian Road, Fuhai, BaoAn District, Shenzhen, Guangdong Province, China

电话 Tel: 86-755-29169191, 29169292 传真 Fax: 86-755-29169007 邮箱 Email: sales@hengdrive.com 网址 Http://www.hengdrive.com