

BA216S	Outer Rotor	Output Power 输出功率: 1W~85W	Weight 重量: 650g (Approx.)
	外转子		
Brushless DC Motor-Typical Application (In development)			
无刷直流电机-典型应用 (研发中)			
With Servo Controller, Angle Position 0.05°			
含伺服驱动控制器, 机械转角精度 0.05°			
Specialized for Laser Rader & Camera PTZ of Security Monitor			
专用于激光雷达和安防监控摄像云台			




Model 型号	Voltage(V) 电压		No Load 空载		Rated Load 额定负载				Stall 堵转	
	Operating Range	Rated	Speed (rpm)	Current (A)	Torque (Nm)	Speed (rpm)	Current (A)	Output P. (W)	Torque (Nm)	Current (A)
BA216S-S01	8-26	12	219	0.1	0.5	10	0.3	0.53	1.7	3.17
BA216S-S02	8-26	12	219	0.1	0.5	155	1	8.1	1.7	3.17
BA216S-S03	8-26	24	664	0.15	1.2	500	3.4	62.8	4.1	15.6

Characteristic: High precision servo controller, RS485/232, Speed & position closed loop, Low noise, Low EMI, Long life 3000-15000hrs
特征: 高精度伺服控制, 带 RS485/232 通信接口, 转速和位置双闭环, 低噪音, 低电磁干扰, 超长寿命 3000-15000 小时

Notice: Data in this typical specification sheet are for other certain customer. Voltage, rated torque, speed, current, power and shaft extension feature & dimension can be changed to meet customer specific requirement.

注意: 上述规格仅针对特定客户, 电压、扭矩、转速、电流、功率、输出轴的特征和尺寸等都可以按照客户的特殊要求进行调整。

Outline Drawing 外形图:

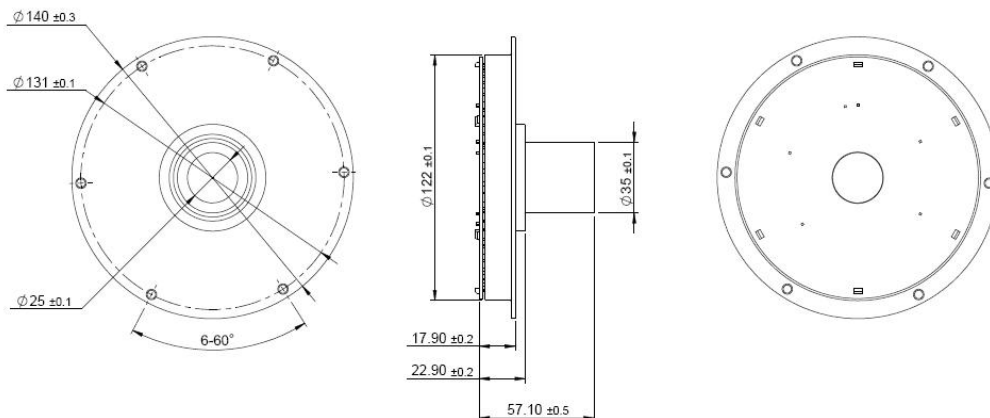


Unit: Millimeter

Performance Curve 性能曲线:


BA216S-S02

12V

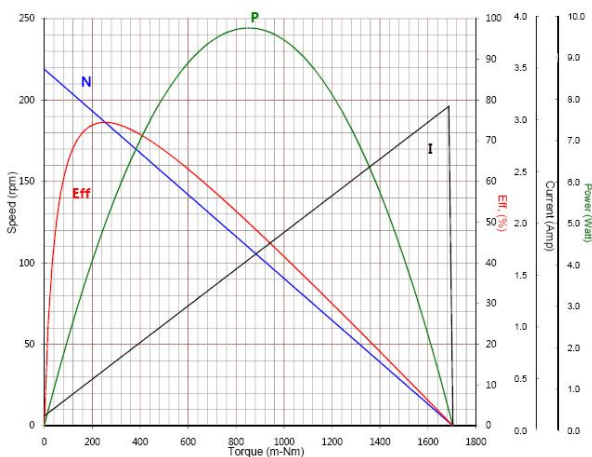

BA216S-S03

24V

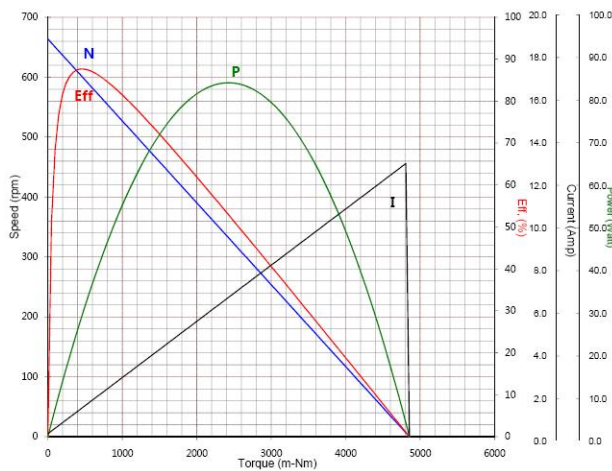

地址: 广东省深圳市宝安区福海新田大道福宁高新产业园 A 栋、F 栋

Address: Building A & F, Funing Hi-Tech Park, Xintian Road, Fuhai, BaoAn District, Shenzhen, Guangdong Province, China

电话 Tel: 86-755-29169191, 29169292 传真 Fax: 86-755-29169007 邮箱 Email: sales@hengdrive.com 网址 Http://www.hengdrive.com