

B6050S	Outer Rotor	Output Power 输出功率:20W~300W	Weight 重量: 530g (Approx.)
	外转子		

Brushless DC Motor-Typical Application 直流无刷电机-典型应用
 Automotive Parts: Pump, Actuator 汽车部件: 泵, 致动器
 Home Application: Pump, Stirrer, Grinder, Mincing Machine, Coffee Machine, Water Dispenser
 家用电器: 家电泵, 搅拌器, 研磨机, 碎肉机, 咖啡机, 饮水机
 Medical Apparatus: Medical Pump, Medical Stirrer, Centrifugal Machine, Oxygenators
 医疗器械: 医疗泵, 医用搅拌器, 离心机, 制氧机
 Industry Equipment: Air Compressor, Electric Valve
 工业设备: 气体压缩机, 电动阀门
 Business Equipment: Printer, Copier, ATM, Vending Machine, Shredder
 商业设备: 打印机, 复印机, ATM 机, 售卖机, 碎纸机




Model 型号	Voltage(V) 电压		No Load 空载		Rated Load 额定负载				Stall 堵转	
	Operating Range	Rated	Speed (rpm)	Current (A)	Torque (Nm)	Speed (rpm)	Current (A)	Output P. (W)	Torque (Nm)	Current (A)
B6050S-S01	8-26	12	2831	0.84	0.2	2433	6.02	50.99	1.42	20
B6050S-S02	8-26	24	3895	0.58	0.32	3262	5.66	108.4	1.95	20
B6050S-S03	36-48	36	2862	0.28	0.6	2243	5.46	141.09	2.78	10

Characteristic: High Efficiency, CW & CCW, Signal function available, Locked rotor protection, Stepless speed regulation, Low EMI, Long life 10000-30000hrs
特征: 高效率, 双转向, 信号功能, 锁定保护, 无级调速, 低电磁干扰, 超长寿命 10000-30000 小时

Notice: Data in this typical specification sheet are for other certain customer. Voltage, rated torque, speed, current, power and shaft extension feature & dimension can be changed to meet customer specific requirement.

注意: 上述规格仅针对特定客户, 电压、扭矩、转速、电流、功率、输出轴的特征和尺寸等都可以按照客户的特殊要求进行调整。

Outline Drawing 外形图:

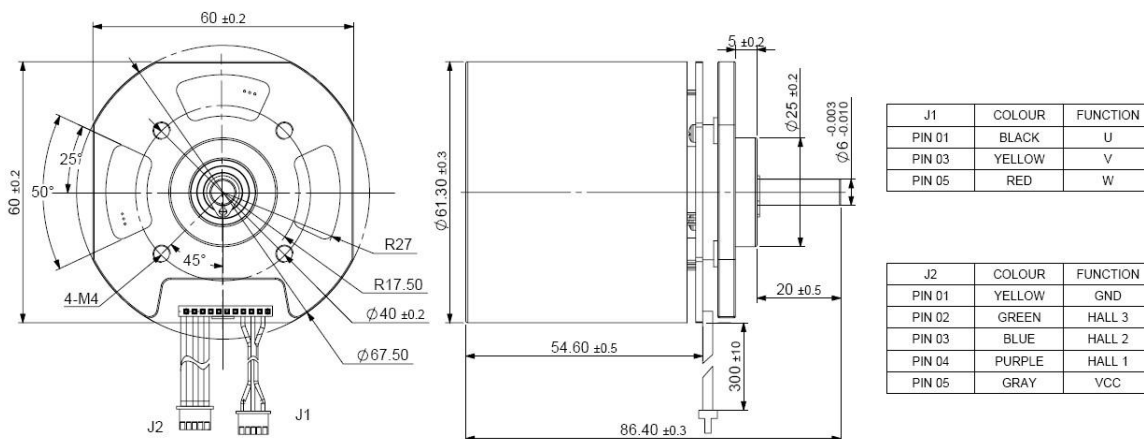


Unit: Millimeter

Performance Curve 性能曲线:


B6050S-S02

24V

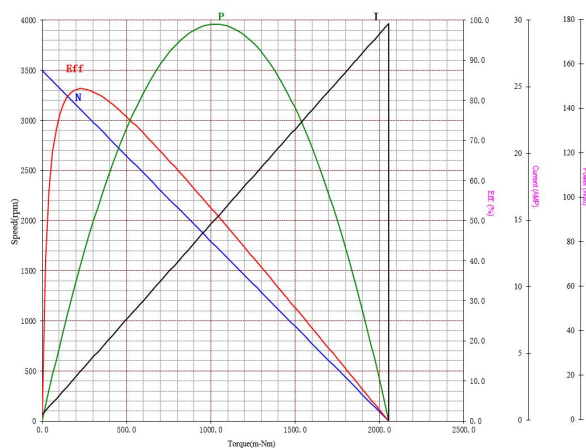

B6050S-S03

DC36V

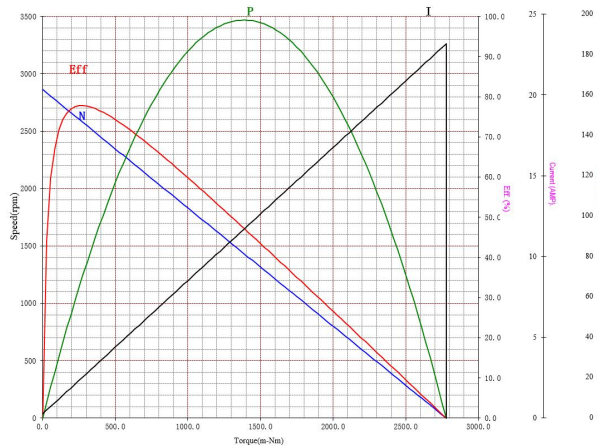

地址: 广东省深圳市宝安区福海新田大道福宁高新产业园 A 栋、F 栋

Address: Building A & F, Funing Hi-Tech Park, Xintian Road, Fuhai, BaoAn District, Shenzhen, Guangdong Province, China

电话 Tel: 86-755-29169191, 29169292 传真 Fax: 86-755-29169007 邮箱 Email: sales@hengdrive.com 网址 Http://www.hengdrive.com